

## Specifications

		RV-2-3DH	RV-2-3DHL
Board size		Standard: 50mm×50mm-410mm×300mm Long board: 50mm×50mm-630mm×300mm*1 Marking unit: 50mm×50mm-330mm×250mm	Standard: 50mm×50mm-410mm×590mm Long board: 50mm×50mm-650mm×590mm*1 Marking unit: 50mm×50mm-330mm×590mm
Test resolution		12 μm (standard resolution) / 5 μm (high resolution)*1	
Image angle		48.0×36.0mm, 20.0×15.0mm*1	
Inspection items		Shorting, shear, polarity, side-reverse, unsoldered solder, bridge, solder quantity, insertion part omission, character recognition*1	
Inspection speed (optimum condition)	3D	61.8cm <sup>2</sup> / sec	
Power supply		AC 3-phase 200-230V *2	
Apparent power		2.0kVA or less	
Air pressure		0.5±0.05MPa	
Air consumption (standard condition)		10L/min	
External Dimensions (W×D×H)		940mm×1,276mm×1,530mm	940mm×1,800mm×1,530mm
Weight		approximately 1,000kg	approximately 1,250kg

\*1 This can be done with the optional.

\*2 The optional external transformer can accommodate 240V AC 3-phase and 380V-430V.

## Option

Hardware options		Software options	
Lens Resolution 5μm	•	Communication license	•
NG marking Unit	•*1	Code reader silence	•
Dispenser Unit	△*2	OCR silence	•
Emergency Pass Unit	•	TOPSS System license	•
UV light	•	Server software	•
Long board	•*3	Remote judge (CCC) license	•
Board back up unit	•	Repair System license	•
Calibration plate	•	SPC license	•
Vibration control pad KIT	•	QT (Quarty trace) license	•
IF cable	•	Offline system software	•
OK, NG Cable	•	Offline basic module	•
Transformer	•	Off-line code reader license	•
SSD 2TB	•	OCR license for off line system	•
Memory expansion unit*4	•	Data shere system license	•

\*1 The option is possible except when selecting long model data.

\*2 △: Customized order

\*3 Maximum size: RV-2-3DH: 630mm×300mm, RV-2-3DHL: 650mm×590mm

\*4 Please contact for details.

**JUKI ECO PRODUCTS** The RV-2-3DH is an eco-friendly product which complies with JUKI ECO PRODUCTS standards for protecting the environment.

**ECO** The machine complies with the "JUKI Group Green Procurement Guidelines" on the use of hazardous substances, which is stricter than other restrictions, such as those of the RoHS Directive.

JUKI ECO PRODUCTS For details of JUKI ECO PRODUCTS, refer to: [http://www.juki.co.jp/eco\\_e/index.html](http://www.juki.co.jp/eco_e/index.html)  
\*The RoHS Directive is an EU Directive limiting the use of 6 hazardous substances (lead, hexavalent chromium, mercury, cadmium, PBB and PBDE) in electrical and electronic equipment. The JUKI Green Procurement Guideline is the voluntarily established criteria to eliminate not only the aforementioned six substances, but also other ones which also adversely affect the environment.



JUKI SMI SITE



JUKI CORPORATION HEAD OFFICE

The activities of research, development, design, sales, distribution, and maintenance services of industrial sewing machines, household sewing machines and industrial robots, etc., including sales and maintenance services of data entry systems.

\*Please refer to the product specifications for details.

■ JUKI Specifications and appearance may be changed without notice.

MANUFACTURER: JUKI CORPORATION

INQUIRY: JUKI AUTOMATION SYSTEMS CORPORATION

2-11-1, Tsurumaki, Tama-shi, Tokyo 206-8551, JAPAN  
TEL.81-42-357-2293 FAX.81-42-357-2285

**JUKI**  
www.juki.co.jp

JUKI AUTOMATION SYSTEMS GMBH.  
www.juki-smt.com

JUKI AUTOMATION SYSTEMS INC.  
www.jukiamericas.com

TOKYO JUKI INTERNATIONAL  
TRADING (SHANGHAI) CO.,LTD.  
www.jukichina.com

JUKI INDIA PVT. LTD.  
www.smtjukiindia.com

JUKI SMT ASIA CO.,LTD.

Jun-2020/Rev.01

3D solder paste inspection machine (SPI)  
3D board visual inspection machine (AOI)

**JUKI**

JUKISmart Solutions

# RV-2-3DH

# RV-2-3DHL



**Make Future  
Faster and Accuracy**

**Overwhelming speed  
Remarkable accuracy**

# Feature 1 Overwhelming speed


Large improvement in inspection tact with high-pixel (12 million pixels)

1,200 The use of a high-pixel camera with all pixels has expanded the camera field of view by 192% compared to the previous model. This resulted in the fastest inspection speed in the world in the class, 61.8cm<sup>2</sup>/sec. By speeding up inspection speeds, we can further accelerate production lines. In addition, by enlarging the angle of the image, the inspection was realized with a minimum number of blocks.


1. Inspection speed 61.8 cm<sup>2</sup>/sec
2. Resolution 12 million pixels
3. Image angle 48mm×36mm
4. Number of inspection blocks Significant reduction



\* As of June 2020

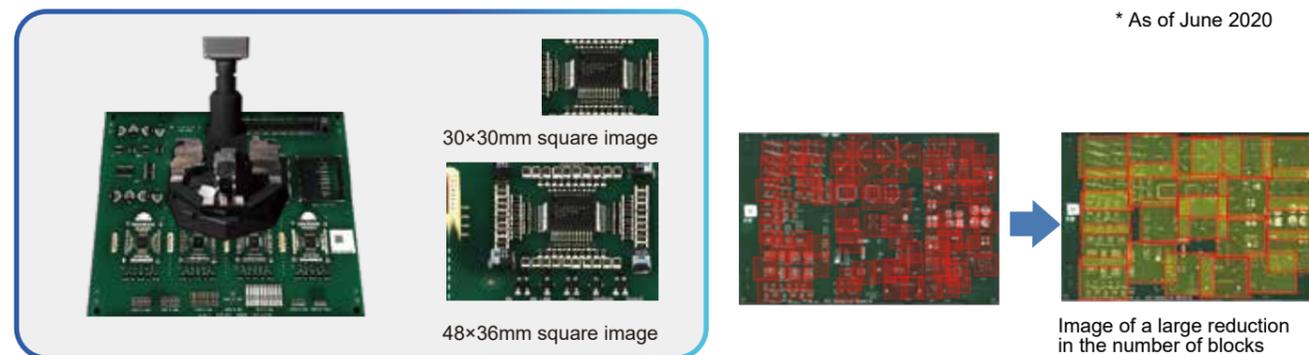

## High-speed inspection achieves the highest throughput

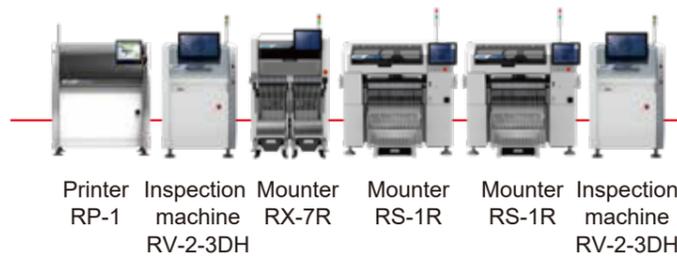

Significant improvement in productivity



# Feature 2 Remarkable accuracy

Using high-resolution lenses improves inspection accuracy of ultra-compact components

The use of a 5 μm (optional) high-resolution lens enables more accurate inspection of microminiature parts such as 0201 parts. This system achieves high-precision inspections even in the production of ultra-small parts and high-precision products, such as smartphones and precision equipment that require high-density production.



High density substrate image




5 μm inspection image



# Feature 3 Ease of use of rating

Process modes that are easy to use and create, from beginners to senior citizens

The "Template Mode" is a simple, quick, and high performance inspection that automatically generates packages by only selecting test part types with a pre-prepared template. In addition, adjusting black and white and color parameters and adjusting the 3D threshold allow you to customize the inspection standards freely, making it easy for less experienced operators to create the test data. In addition, a unique process mode can be mounted as a standard, making it more flexible.

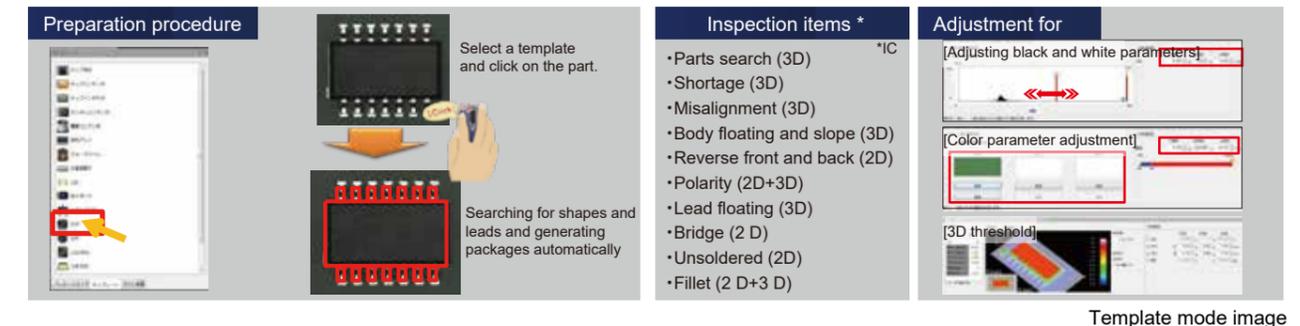


Template mode image

# Feature 4 Visual inspection automation

RV series, which can also be used for measurement

It is possible to automation visual inspections that have been performed manually, such as clearance checks, hole diameters, pitch checks, geometry checks, color checks, and dirt checks of processed parts, press parts, ASSY parts, etc. It is ideal for measuring important precision components such as automotive, medical, and electronic devices. In addition, labor shortages and in-line inspection processes are realized.

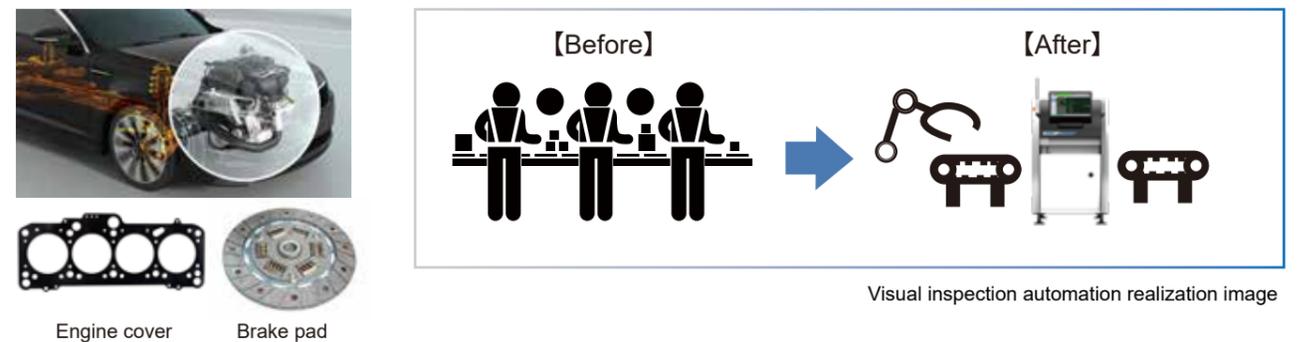

Visual inspection automation realization image

# Feature 5 For improving the efficiency of the entire plant

Achieving the efficiency of the entire factory through system linkage

We also action to the JaNets that connects the entire manufacturing process through networks. We will not only improve quality and productivity, but also visualize management information. In addition, in addition to integrated control of various types of data for each line, the external output function (OP) enables system linkage with the MES customers own.

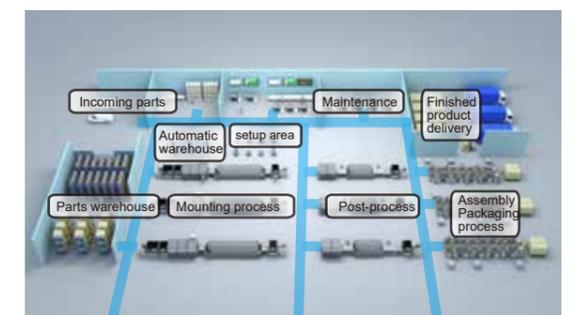


Image of System Collaboration